



| SUPPORT SPACING (ℓ)                           | DESIGN ALLOWABLE LOAD (p) | FIXING METHOD |
|-----------------------------------------------|---------------------------|---------------|
| $\ell \leq 3000 \text{ mm}$                   | $p < 130 \text{ kg/m}^2$  | type 1        |
| $\ell \leq 3000 \text{ mm}$                   | $p > 130 \text{ kg/m}^2$  | type 2        |
| $3000 \text{ mm} < \ell \leq 4000 \text{ mm}$ | $p < 130 \text{ kg/m}^2$  | type 2        |
| $\ell > 3000 \text{ mm}$                      | $p > 130 \text{ kg/m}^2$  | type 3        |
| $\ell > 4000 \text{ mm}$                      | $p \text{ any load}$      | type 3        |

TYPE 1

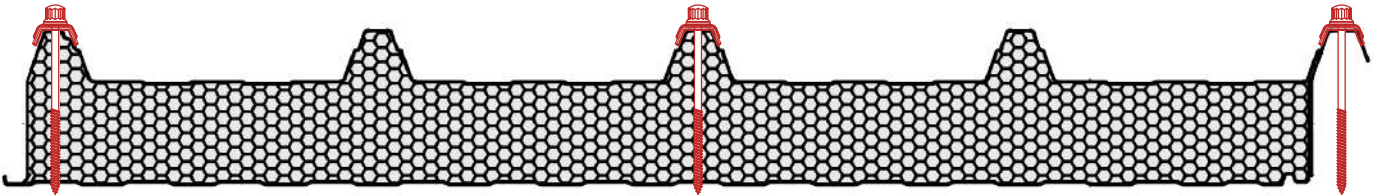

TYPE 2

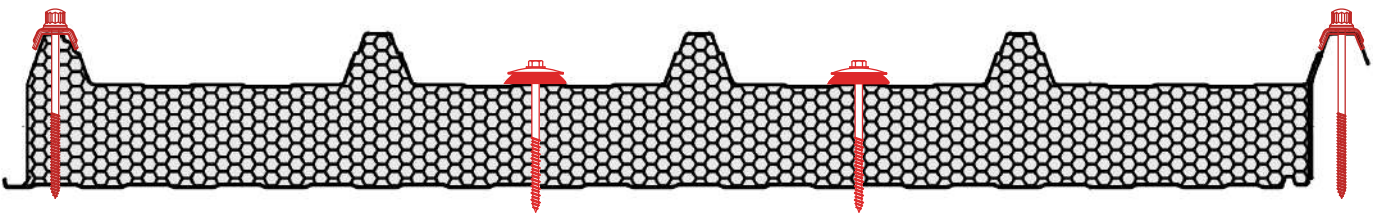

TYPE 3

