


# Mono PENTA Deck

Pannelli copertura in poliuretano con supporto esterno in cartongfetro bitumato


Roof panels with polyurethane insulation and external support in bitumized felt paper

Dachpaneele, isoliert mit Pu Schaum und mit Außenseite aus bitumen-Filzkarton


Panneaux de couverture avec isolation en polyuréthane et avec le support extérieure en carton-feutre bitumé

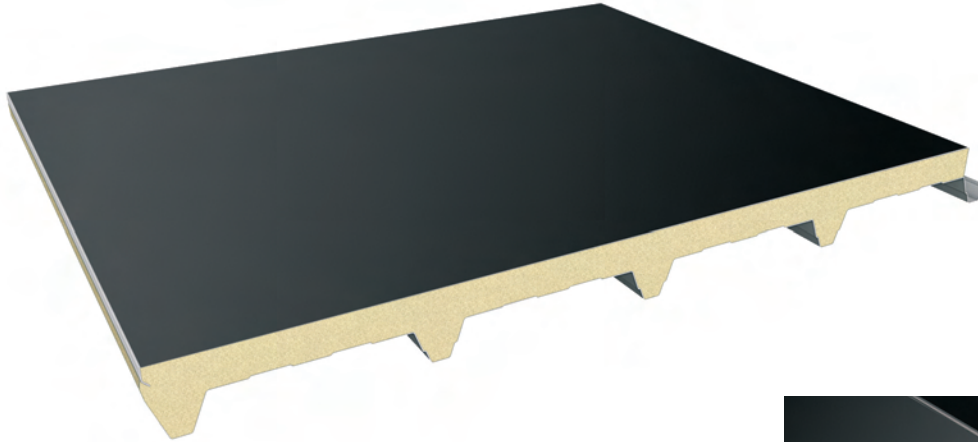

PARTICOLARE DEL GIUNTO

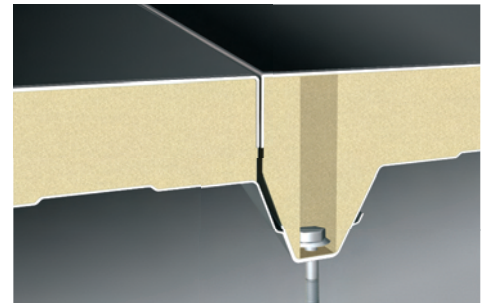

- Spessore (mm)
- Thickness
- Plattenstärke
- Epaisseur

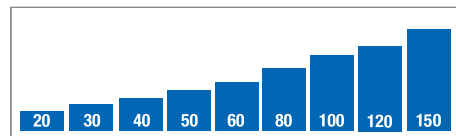

Spessore Pannello (mm)	Trasmittanza Termica in Accordo UNI EN 14509 A.10 U (W/m <sup>2</sup> K)	Trasmittanza Termica in Accordo EN ISO 6946 K (W/m <sup>2</sup> K)
20	1,20	0,91
30	0,8	0,68
40	0,6	0,55
50	0,5	0,46
60	0,45	0,39
80	0,3	0,30
100	0,26	0,24
120	0,2	0,20
150	0,1	0,16

DISEGNO TECNICO Mono PENTA Deck

